

1. Specificaties opmaak drukwerk bestanden

De data voor het drukwerk dient in **HiRes PDF formaat** aangeleverd te worden.

We adviseren hiervoor gebruik te maken van professionele software als Adobe InDesign, Adobe Illustrator of QuarkXpress voor uw artwork. Microsoft software of Correl Draw geeft niet hetzelfde resultaat en kan niet worden verwerkt.

Layout

Het formaat dat u gebruikt in het document moet corresponderen met het formaat van het eindproduct. **Houdt u rekening met 3 mm overvul/bleed rondom.** Teksten en beelden mogen niet te dicht tegen de rand te worden geplaatst om te voorkomen dat ze worden afgesneden, tenzij dit absoluut de bedoeling is. Blanco pagina's verwijderen, tenzij dit de bedoeling is. Objecten die zich buiten de layout bevinden dienen ook te worden verwijderd.

Gebruik voor uw layout onze maattekeningen/templates. Op onze website kunt u templates downloaden. Templates voor specifieke verpakkingen kunt u opvragen.

Fonts en het gebruik van font management software

Verkeerde fonts leveren helaas herhaaldelijk problemen op. De redenen hiervan zijn onder andere versie conflicten tussen TrueType en PostScript fonts, niet correcte speciale karakters of fonts die niet zijn embedded.

Gebruik voor een juist gebruik van fonts een goed font management programma als Adobe Type Manager of Extensis Suitcase.

Zo bent u er zeker van dat alle fonts correct zijn embedded in de PostScript File. Dit komt doordat deze software een foutmelding geeft als er sprake is van onvolkomen, incomplete of dubbele fonts in de file.

Gebruik in uw artwork enkel die fonts die echt noodzakelijk zijn. Vermijd het gebruik van Multiple Master fonts and selecteer altijd ongewijzigde font stijlen. EPS files moeten altijd volledig embedded fonts bevatten. Zet zwarte tekst in "overprint" en witte tekst in "knock- out". Dit wordt niet gecontroleerd!

Beeldformaat en resolutie afbeeldingen

Het is beter dat het artwork geen "haarlijnen" bevat. Gelieve geen areas en outlines in "overprint" te zetten. Delete niet zichtbare objecten en lagen voordat u het bestand opslaat.

De kleurinstelling voor uw bestand dient CMYK te zijn. We adviseren een resolutie van de gebruikte CMYK en grayscale images tussen 300 en 400 dpi. Voor line art is dit 1200 en 1800 dpi. Gebruik EPS of Tiff als bestand formaat voor uw images/graphics.



Barcode

Sla de barcode op in EPS formaat en converteer deze naar naar Paths. Maak de barcode op in 100% zwart en met een 100% plaatsing bij voorkeur op een witte achtergrond. Uw barcode dus niet vergroten of verkleinen.

Over een andere dan bovengenoemde opmaak, kleur of kleurencombinaties worden vragen gesteld en levert vertraging op. Er wordt op leesbaarheid en niet op inhoud gecontroleerd.

Kleurprofielen

Alle bestanden composiet CMYK opmaken. Bestanden met een andere kleurmodus. worden niet geaccepteerd; absoluut geen RGB kleuren gebruiken.

De totale inktbezetting mag niet meer zijn dan 330 %, waarbij het percentage punt grote minimaal 2% en maximaal 98% is.

Gelieve bestanden aan te leveren met het ISO 12647-2:2007 CMYK kleurenprofiel, dat wil zeggen ISO coated v2 CMYK of Fogra 39L CMYK.

Booklet

Het booklet in de juiste volgorde als losse pagina's onder elkaar in 1 HiRes PDF aanleveren. Bij iedere pagina 3 mm snijruimte rondom aanleveren. Pagina nummering aangeven, binnen of buiten het te bedrukken gebied.

Page Creep

Houd bij uw opmaak rekening met de effecten van "page creep" (=pagina krimp) die bij de productie van meerdere pagina booklets optreedt. Deze term refereert aan het fenomeen dat de binnen pagina's naar buiten worden geduwd als het booklet wordt gevouwen.


2. Specificaties opmaak PDF

Hieronder de instellingen die ervoor zorgen dat uw PDF zonder problemen en met het beste eindresultaat kunnen worden verwerkt. Het is essentieel dat u van alle layout bestanden een PDF genereert die zonder fouten is.


Quark Xpress PDF export:

Hieronder vindt u de settings voor:


1. Page

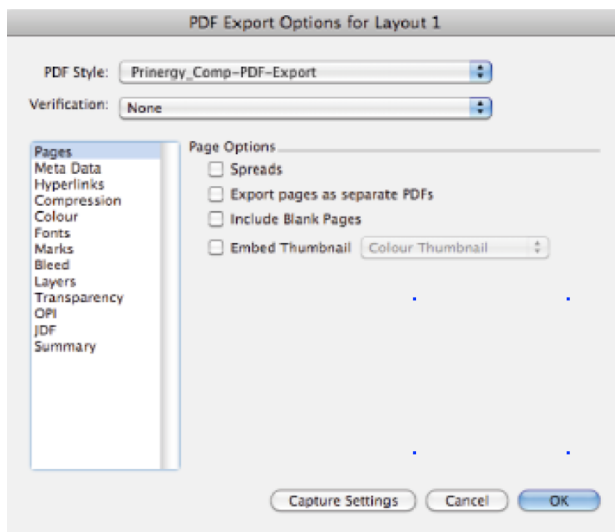


2. Metadata

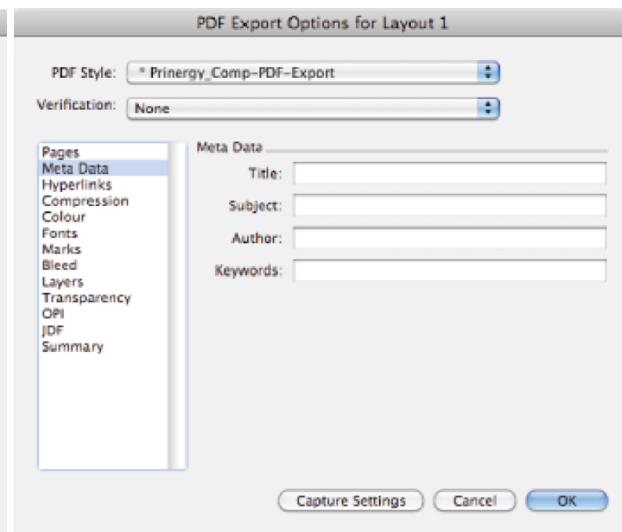

3. Hyperlinks

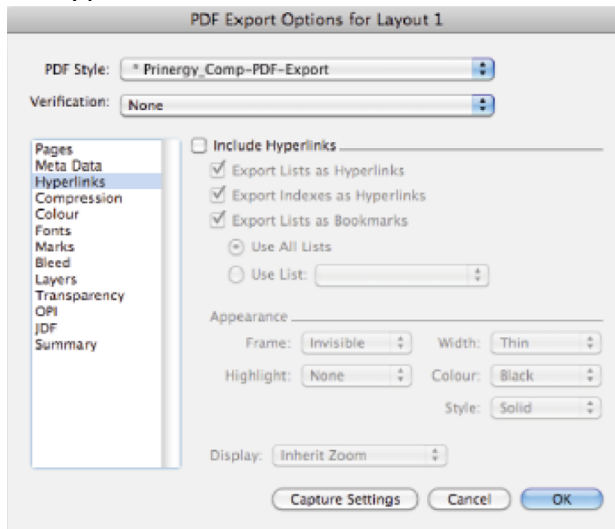

4. Compression

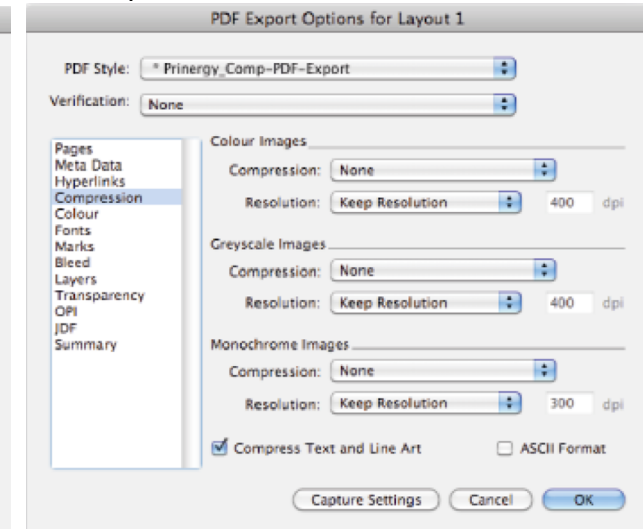

5. Colour

PDF Export Options for Layout 1

PDF Style: * Prinerger_Comp-PDF-Export

Verification: None

Pages
Meta Data
Hyperlinks
Compression
Colour
Fonts
Marks
Bleed
Layers
Transparency
OPI
JDF
Summary

Colour Options

Mode: Composite

Setup: Composite CMYK and Spot

	Plate
☒	Cyan
☒	Magenta
☒	Yellow
☒	Black
☒	PANTONE 368 C

Capture Settings Cancel OK

6. Fonts

PDF Export Options for Layout 1

PDF Style: * Prinerger_Comp-PDF-Export

Verification: None

Pages
Meta Data
Hyperlinks
Compression
Colour
Fonts
Marks
Bleed
Layers
Transparency
OPI
JDF
Summary

Font Options

☒ Select All

Download	Font
☒	Stratum2 Medium
☒	Stratum2 Regular
☒	Univers 47 CondensedLight
☒	Univers 67 CondensedBoldObl
☒	Univers 57 CondensedOblique

Capture Settings Cancel OK

7. Marks

PDF Export Options for Layout 1

PDF Style: * Prinerger_Comp-PDF-Export

Verification: None

Pages
Meta Data
Hyperlinks
Compression
Colour
Fonts
Marks
Bleed
Layers
Transparency
OPI
JDF
Summary

Registration Marks Options

Mode: Centred

Width: 0,088 mm

Length: 7 mm

Offset: 3 mm

☐ Include Bleed Marks

Capture Settings Cancel OK

8. Bleed

PDF Export Options for Layout 1

PDF Style: * Prinerger_Comp-PDF-Export

Verification: None

Pages
Meta Data
Hyperlinks
Compression
Colour
Fonts
Marks
Bleed
Layers
Transparency
OPI
JDF
Summary

Bleed Options

Bleed Type: Symmetric


Amount: 10 mm Left: 10 mm

Bottom: 10 mm Right: 10 mm


☒ Clip at Bleed Edge

Capture Settings Cancel OK


9. Layers

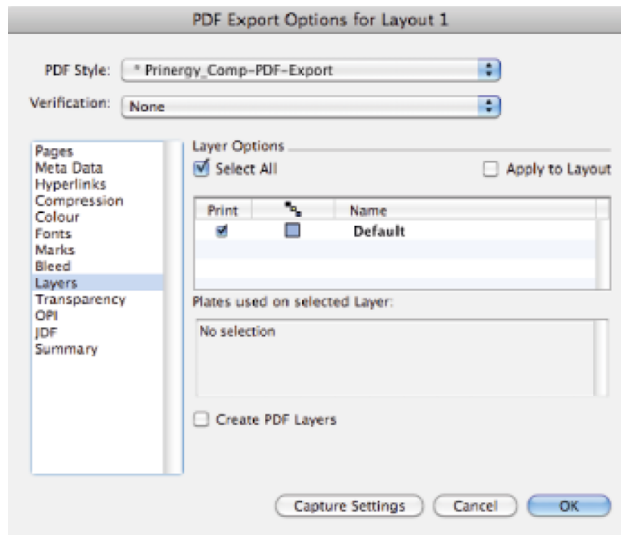


10. Transparency

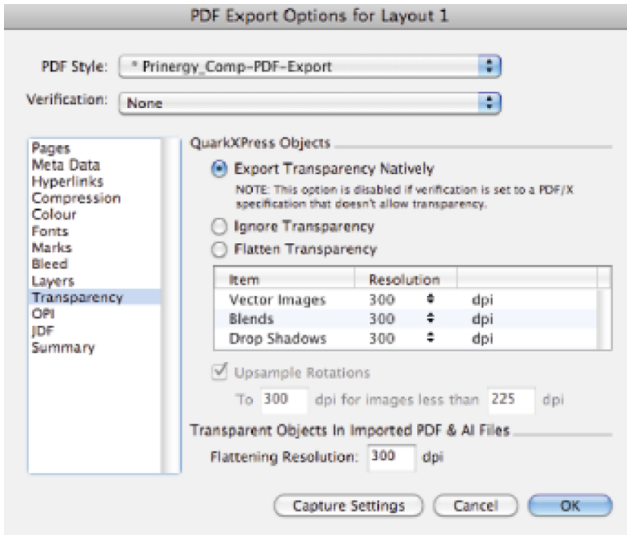

11. OPI

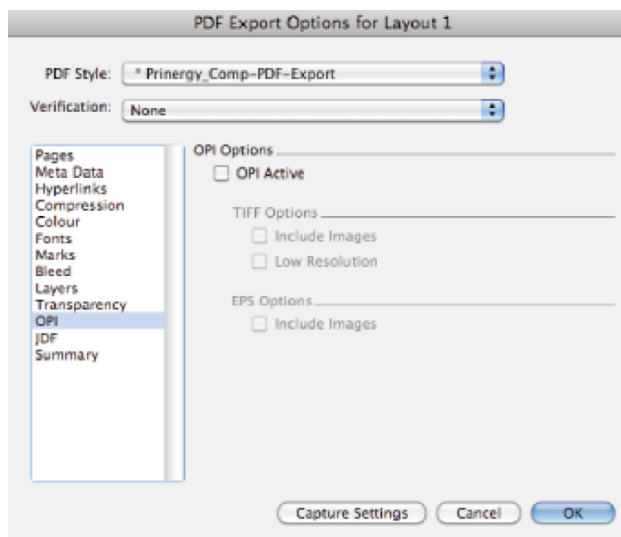


12. JDF

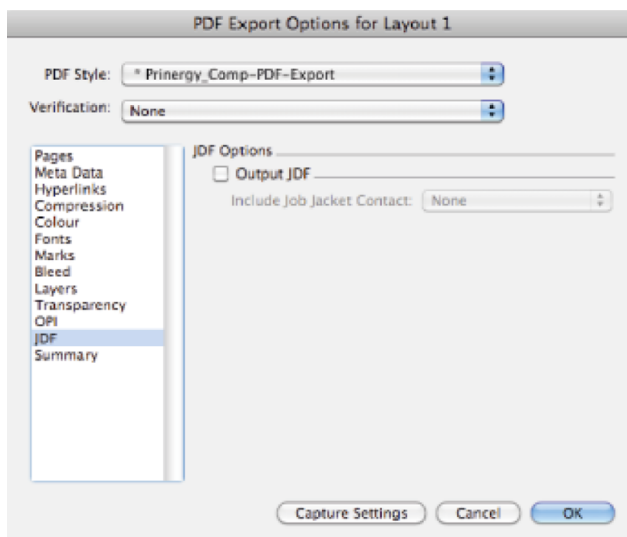

Adobe Indesign PDF Export:

1. General

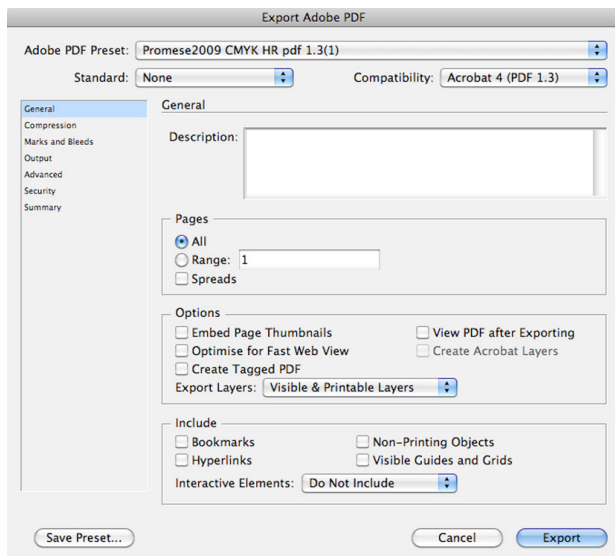

Export Adobe PDF

Adobe PDF Preset: Promese2009 CMYK HR pdf 1.3(1)

Standard: None Compatibility: Acrobat 4 (PDF 1.3)

General

Description:

Pages

☒ All

☐ Range: 1

☐ Spreads

Options

☐ Embed Page Thumbnails ☐ View PDF after Exporting

☐ Optimise for Fast Web View ☐ Create Acrobat Layers

☐ Create Tagged PDF

Export Layers: Visible & Printable Layers

Include


☐ Bookmarks ☐ Non-Printing Objects

☐ Hyperlinks ☐ Visible Guides and Grids

Interactive Elements: Do Not Include

Save Preset... Cancel Export

2.Compression

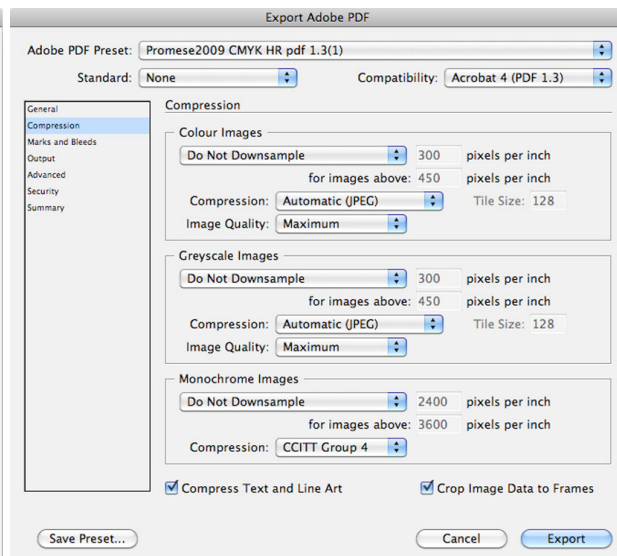

Export Adobe PDF

Adobe PDF Preset: Promese2009 CMYK HR pdf 1.3(1)

Standard: None Compatibility: Acrobat 4 (PDF 1.3)

Compression

Colour Images

Do Not Downsample 300 pixels per inch

for images above: 450 pixels per inch

Compression: Automatic (JPEG) Tile Size: 128

Image Quality: Maximum

Greyscale Images

Do Not Downsample 300 pixels per inch

for images above: 450 pixels per inch

Compression: Automatic (JPEG) Tile Size: 128

Image Quality: Maximum

Monochrome Images

Do Not Downsample 2400 pixels per inch


for images above: 3600 pixels per inch

Compression: CCITT Group 4

☒ Compress Text and Line Art ☒ Crop Image Data to Frames

Save Preset... Cancel Export

3. Marks and bleeds

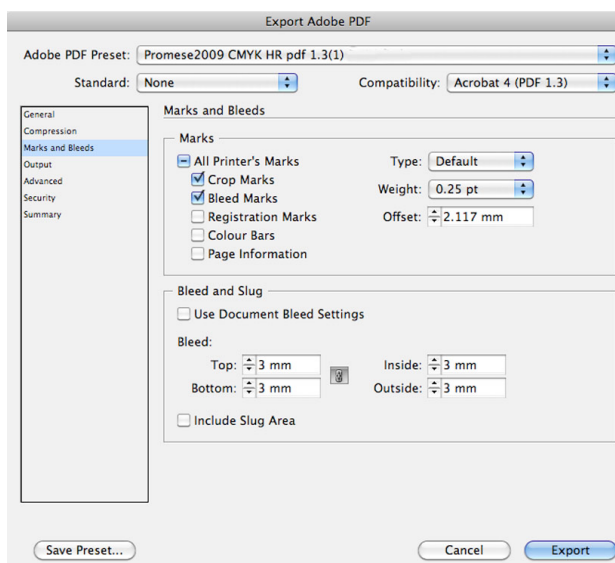

Export Adobe PDF

Adobe PDF Preset: Promese2009 CMYK HR pdf 1.3(1)

Standard: None Compatibility: Acrobat 4 (PDF 1.3)

Marks and Bleeds

Marks

☒ All Printer's Marks Type: Default

☒ Crop Marks Weight: 0.25 pt

☒ Bleed Marks Offset: 2.117 mm

☐ Registration Marks

☐ Colour Bars

☐ Page Information

Bleed and Slug

☐ Use Document Bleed Settings

Bleed:


Top: 3 mm Inside: 3 mm

Bottom: 3 mm Outside: 3 mm

☐ Include Slug Area

Save Preset... Cancel Export

4. Output

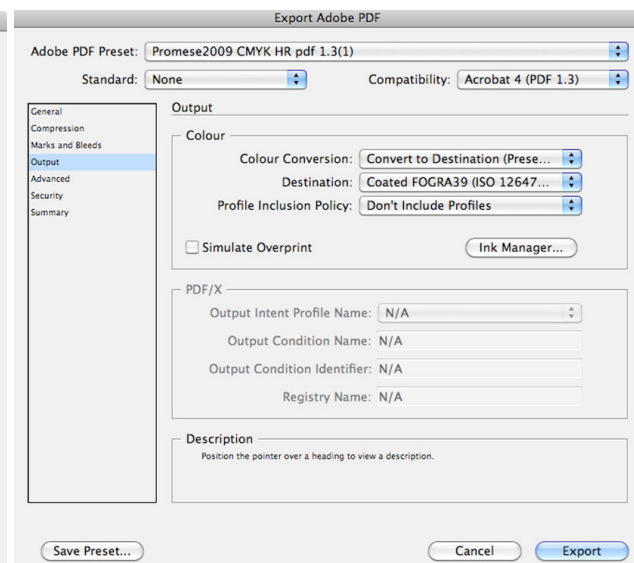

Export Adobe PDF

Adobe PDF Preset: Promese2009 CMYK HR pdf 1.3(1)

Standard: None Compatibility: Acrobat 4 (PDF 1.3)

Output

Colour

Colour Conversion: Convert to Destination (Prese...)

Destination: Coated FOGRA39 (ISO 12647...)

Profile Inclusion Policy: Don't Include Profiles

☐ Simulate Overprint Ink Manager...

PDF/X

Output Intent Profile Name: N/A

Output Condition Name: N/A

Output Condition Identifier: N/A

Registry Name: N/A


Description

Position the pointer over a heading to view a description.

Save Preset... Cancel Export

5. Advanced

6. Security

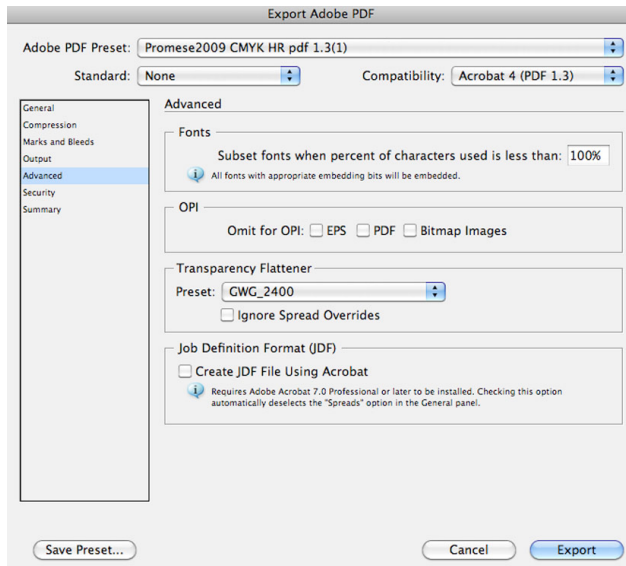

Export Adobe PDF

Adobe PDF Preset: Promese2009 CMYK HR pdf 1.3(1)

Standard: None Compatibility: Acrobat 4 (PDF 1.3)

Advanced

Fonts

Subset fonts when percent of characters used is less than: 100%

All fonts with appropriate embedding bits will be embedded.

OPI

Omit for OPI: ☐ EPS ☐ PDF ☐ Bitmap Images

Transparency Flattener

Preset: CWC_2400


☐ Ignore Spread Overrides

Job Definition Format (JDF)

☐ Create JDF File Using Acrobat

Requires Adobe Acrobat 7.0 Professional or later to be installed. Checking this option automatically deselects the "Spreads" option in the General panel.

Save Preset... Cancel Export

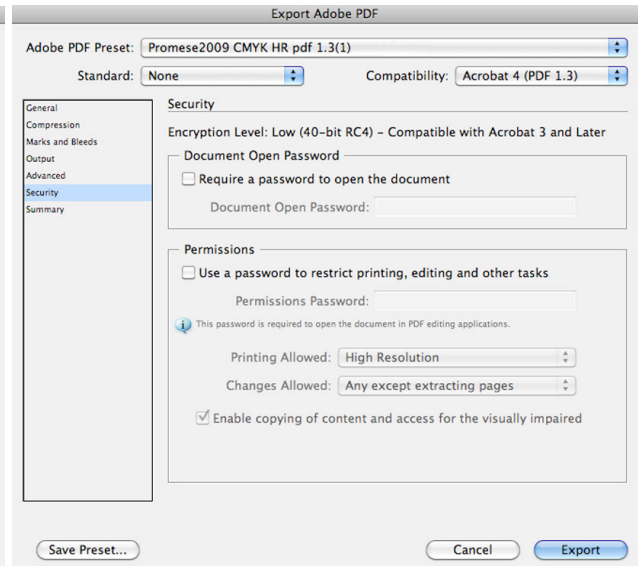

Export Adobe PDF

Adobe PDF Preset: Promese2009 CMYK HR pdf 1.3(1)

Standard: None Compatibility: Acrobat 4 (PDF 1.3)

Security

Encryption Level: Low (40-bit RC4) - Compatible with Acrobat 3 and Later

Document Open Password

☐ Require a password to open the document

Document Open Password:

Permissions

☐ Use a password to restrict printing, editing and other tasks

Permissions Password:

This password is required to open the document in PDF editing applications.

Printing Allowed: High Resolution


Changes Allowed: Any except extracting pages

☒ Enable copying of content and access for the visually impaired

Save Preset... Cancel Export

7.

Summary

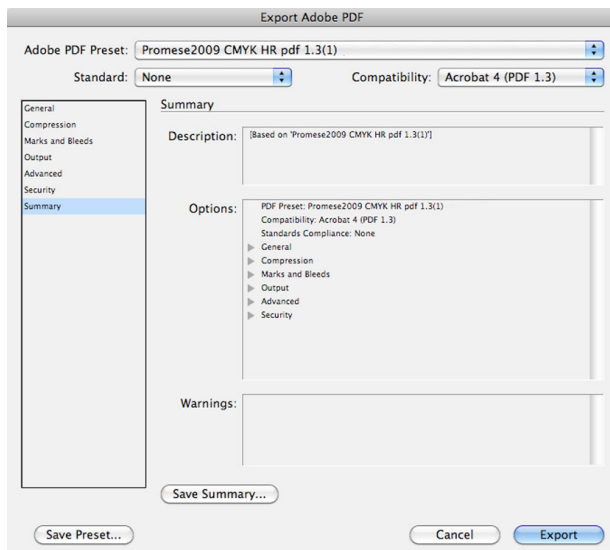

Export Adobe PDF

Adobe PDF Preset: Promese2009 CMYK HR pdf 1.3(1)

Standard: None Compatibility: Acrobat 4 (PDF 1.3)

Summary

Description: [Based on "Promese2009 CMYK HR pdf 1.3(1)"]

Options:

- PDF Preset: Promese2009 CMYK HR pdf 1.3(1)
- Compatibility: Acrobat 4 (PDF 1.3)
- Standards Compliance: None
- General
- Compression
- Marks and Bleeds
- Output
- Advanced
- Security

Warnings:


Save Summary...

Save Preset... Cancel Export


2.4 Adobe Distiller job opties:

Hieronder vindt u de job opties voor Adobe Distiller:

1. General

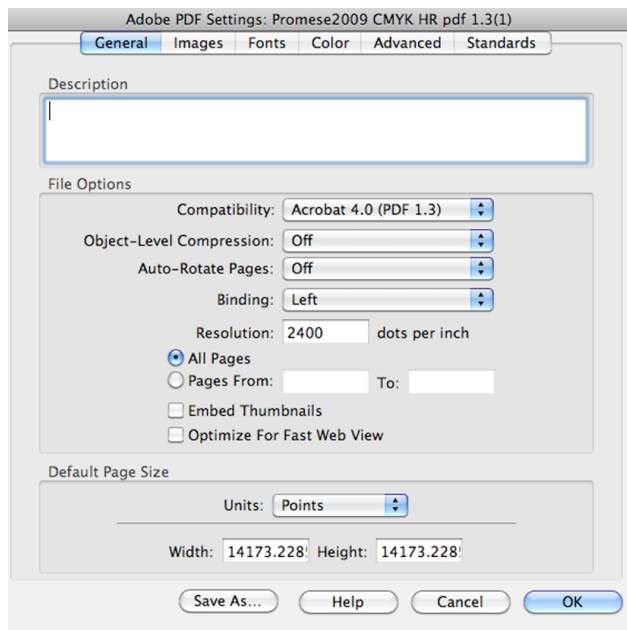

2. Images

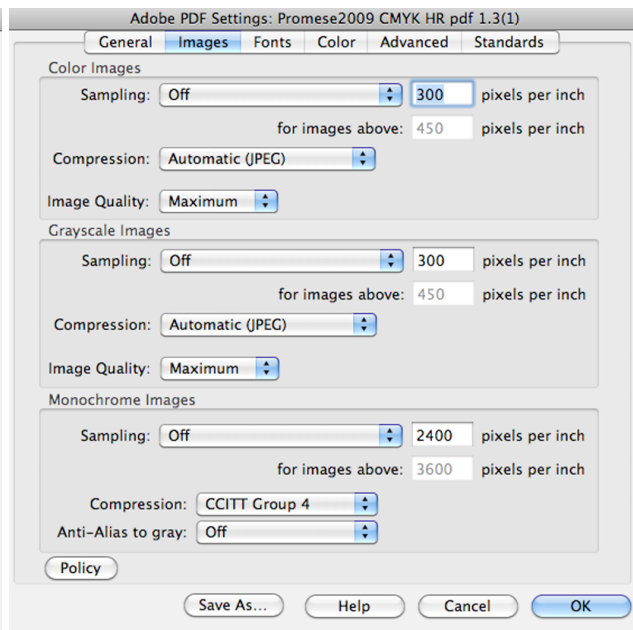

3. Fonts

4. Color

Adobe PDF Settings: Promese2009 CMYK HR pdf 1.3(1)

General Images **Fonts** Color Advanced Standards

☒ Embed all fonts
☐ Embed OpenType fonts
☐ Subset embedded fonts when percent of characters used is less than: 100 %
 Only fonts with appropriate permission bits will be embedded
 When embedding fails: Warn and continue

Embedding

/Users/artprep/Library/Font Source

Add->

Always Embed Font

Never Embed Font

Add->

Add Name... Remove

Save As... Help Cancel OK

Adobe PDF Settings: Promese2009 CMYK HR pdf 1.3(1)

General Images Fonts **Color** Advanced Standards

Adobe Color Settings

Settings File:

Color Management Policies

Convert All Colors to CMYK

Document Rendering Intent: Preserve

Working Spaces

Gray: Dot Gain 20%

RGB: sRGB IEC61966-2.1

CMYK: Coated FOGRA39 (ISO 12647-2:2004)

☒ Preserve CMYK values for calibrated CMYK color spaces

Device-Dependent Data

☐ Preserve Under Color Removal and Black Generation
 When transfer functions are found: Apply
☐ Preserve Halftone Information

Save As... Help Cancel OK

5. Advanced

Adobe PDF Settings: Promese2009 CMYK HR pdf 1.3(1)

General Images Fonts Color **Advanced** Standards

Options

☐ Allow PostScript file to override Adobe PDF Settings
☐ Allow PostScript XObjects
☐ Convert gradients to smooth shades
☐ Convert smooth lines to curves
☒ Preserve Level 2 copypage semantics
☒ Preserve Overprint Settings
☒ Overprinting default is nonzero overprinting
☒ Save Adobe PDF Settings inside PDF file
☒ Save original JPEG images in PDF if possible
☒ Save Portable Job Ticket inside PDF file
☐ Use Prologue.ps and Epilogue.ps

Document Structuring Conventions (DSC)

☒ Process DSC comments
☐ Log DSC warnings
☒ Preserve EPS information from DSC
☐ Preserve OPI comments
☒ Preserve document information from DSC
☒ Resize page and center artwork for EPS files

Save As... Help Cancel OK

6. Standards

Adobe PDF Settings: Promese2009 CMYK HR pdf 1.3(1)

General Images Fonts Color Advanced **Standards**

Standard Reporting and Compliance

Compliance Standard: None

When not compliant: Continue

If Neither TrimBox nor ArtBox are Specified

☐ Report as error
☒ Set TrimBox to MediaBox with offsets (Points):
 Left: 0 Right: 0 Top: 0 Bottom: 0

If BleedBox is Not Specified

☐ Set BleedBox To MediaBox
☒ Set BleedBox To TrimBox with offsets (Points):
 Left: 0 Right: 0 Top: 0 Bottom: 0

Default Values if Not Specified in the Document

Output Intent Profile Name: No Default Profile

Output Condition Identifier:

Output Condition:

Registry Name(URL):

Trapped: Insert False

Save As... Help Cancel OK